


## Rockwool Conrock Q3

Lambda  $\lambda$ : 0,042 W/mK

### Isolatiewaarde Rockwool Conrock Q3

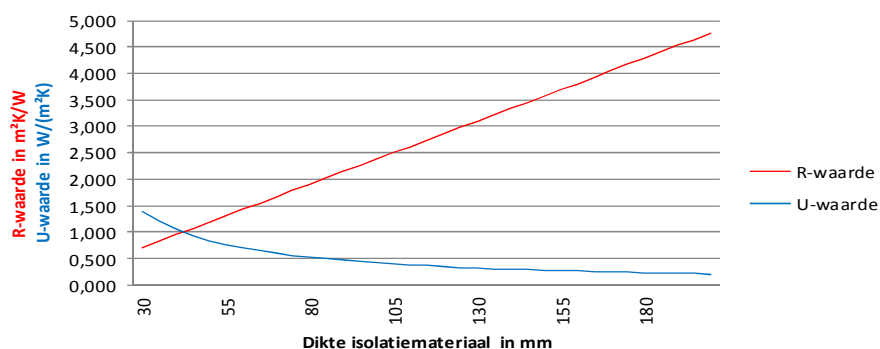

Dikte product	R-waarde	U-waarde
30 mm	0,714	1,400
35 mm	0,833	1,200
40 mm	0,952	1,050
45 mm	1,071	0,933
50 mm	1,190	0,840
55 mm	1,310	0,764
60 mm	1,429	0,700
65 mm	1,548	0,646
70 mm	1,667	0,600
75 mm	1,786	0,560
80 mm	1,905	0,525
85 mm	2,024	0,494
90 mm	2,143	0,467
95 mm	2,262	0,442
100 mm	2,381	0,420
105 mm	2,500	0,400
110 mm	2,619	0,382
115 mm	2,738	0,365
120 mm	2,857	0,350
125 mm	2,976	0,336
130 mm	3,095	0,323
135 mm	3,214	0,311
140 mm	3,333	0,300
145 mm	3,452	0,290
150 mm	3,571	0,280
155 mm	3,690	0,271
160 mm	3,810	0,263
165 mm	3,929	0,255
170 mm	4,048	0,247
175 mm	4,167	0,240
180 mm	4,286	0,233
185 mm	4,405	0,227
190 mm	4,524	0,221
195 mm	4,643	0,215
200 mm	4,762	0,210