


## Rockwool Conrock Q5

Lambda  $\lambda$ : 0,043 W/mK

### Isolatiewaarde Rockwool Conrock Q5

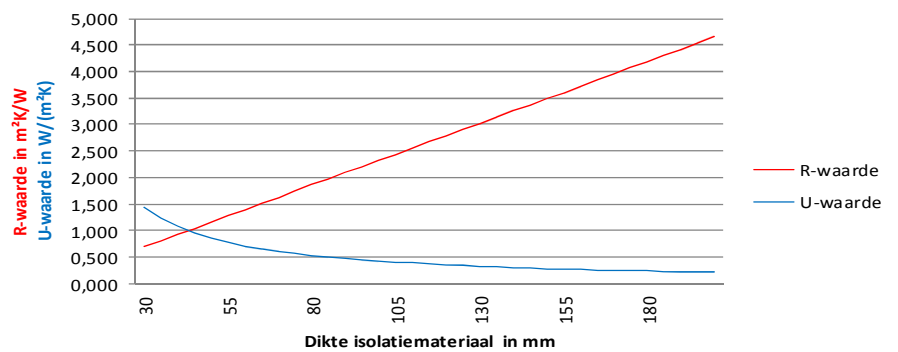

Dikte product	R-waarde	U-waarde
30 mm	0,698	1,433
35 mm	0,814	1,229
40 mm	0,930	1,075
45 mm	1,047	0,956
50 mm	1,163	0,860
55 mm	1,279	0,782
60 mm	1,395	0,717
65 mm	1,512	0,662
70 mm	1,628	0,614
75 mm	1,744	0,573
80 mm	1,860	0,538
85 mm	1,977	0,506
90 mm	2,093	0,478
95 mm	2,209	0,453
100 mm	2,326	0,430
105 mm	2,442	0,410
110 mm	2,558	0,391
115 mm	2,674	0,374
120 mm	2,791	0,358
125 mm	2,907	0,344
130 mm	3,023	0,331
135 mm	3,140	0,319
140 mm	3,256	0,307
145 mm	3,372	0,297
150 mm	3,488	0,287
155 mm	3,605	0,277
160 mm	3,721	0,269
165 mm	3,837	0,261
170 mm	3,953	0,253
175 mm	4,070	0,246
180 mm	4,186	0,239
185 mm	4,302	0,232
190 mm	4,419	0,226
195 mm	4,535	0,221
200 mm	4,651	0,215